


HUSHPOWER

Fitting instructions for Hushpower© Detachable 12g Silencer

For use with Felt Wad Subsonic Cartridges.

Designed to fit 12g barrels of between 21.5 to 23mm at the muzzle, in the unlikely event the barrel is smaller than 21.5 the barrel sizing adapter 'F' should be used. **This system is Not Recommended for barrels with a high gloss black finish** as the co-efficient of friction of this surface may not be sufficient to prevent slippage of the moderator body.

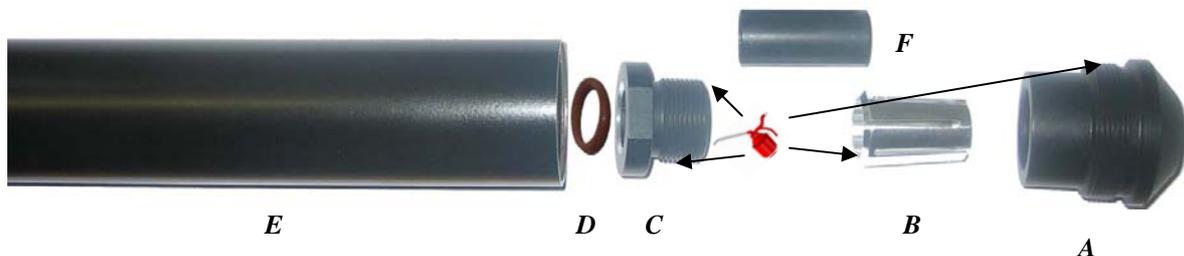

MAKE SURE THE GUN IS NOT LOADED

1. Remove any sighting system from the muzzle.
 2. **Measure barrel diameter at the muzzle:** Barrels smaller than 21.5mm will require the sizing adapter 'F'.
 3. Apply a small quantity of gun oil to all threaded components shown prior to assembly.
 4. **For a 21.5 mm or larger barrel:** Slide part 'A' over the barrel, and then insert part 'B', narrow end first, over the barrel and into part 'A'. Slide part 'C' over the end of the barrel, and screw into part 'A', tightening by hand until the unit starts to grip the barrel. Slide the unit into position **AT LEAST** 10mm behind the foresight hole, then lock the unit into place by tightening part 'C' into 'A' with a spanner tightly. Slide the gas seal 'O' ring (Part 'D') over the barrel and push firmly up against part 'C', and when tightly sealed slide the main silencer tube (Part 'E') over the barrel and screw firmly to part 'A'.
 - For a 21.4mm or smaller barrel:** Slide the adapter 'F' onto the end of the barrel, then slide part 'A' over the barrel, keeping the rear end of the adapter flush with the tapered end of part 'A'. Slide part 'B', narrow end first, over the barrel and into part 'A'. Slide part 'C' over the end of the barrel, and screw into part 'A', tightening by hand until the unit starts to grip the barrel (**NOTE: It is likely that while tightening parts 'A' and 'C' together the adapter will slip from the correct position, and will need to be realigned**). Slide the unit into position **AT LEAST** 10mm behind the foresight hole, then lock the unit into place by tightening part 'C' into 'A' with a spanner. Slide the gas seal 'O' ring (Part 'D') over the barrel and push firmly up against part 'C', and when tightly sealed slide the main silencer tube (Part 'E') over the barrel and screw to part 'A'.
5. Fit a foresight bead to the top of the silencer if required.

Removal instructions:

For all barrel sizes: Detach the main silencer tube (Part 'E') by unscrewing. Unscrew part 'C' from 'A' using a spanner and slide off of the barrel. To remove the lock which part 'B' will have on the barrel, place a piece of wood at the front end of part 'A' and tap with a hammer until parts 'A' and 'B' come loose. Remove all components from the barrel.

If you have any queries regarding Hushpower products please contact us on
01959 573089. email hushpower@btinternet.com